

# LOAN DOCUMENT

			PHOTOGRAPH THIS SHEET	<div style="border: 1px solid black; width: 40px; height: 40px; margin: 0 auto; border-radius: 50%; display: flex; align-items: center; justify-content: center;"> <span style="font-size: 2em;">0</span> </div>								
DTIC ACCESSION NUMBER	LEVEL	INVENTORY										
	<div style="border-bottom: 1px solid black; display: inline-block; margin-bottom: 5px;">NRL-MR-3059</div> <div style="display: inline-block; margin-bottom: 5px;">DOCUMENT IDENTIFICATION</div> <div style="display: inline-block; margin-bottom: 5px;">May 75</div>											
	<div style="border: 1px solid black; padding: 5px; margin: 0 auto; width: 80%;"> <p style="text-align: center; margin: 0;">DISTRIBUTION STATEMENT</p> <p style="text-align: center; margin: 0;">Approved for public release</p> <p style="text-align: center; margin: 0;">Distribution Unlimited</p> </div>											
DISTRIBUTION STATEMENT												
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>ACCESSION FOR</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">NTIS</td> <td style="width: 50%;">GRAM</td> </tr> <tr> <td>DTIC</td> <td>TRAC</td> </tr> <tr> <td>UNANNOUNCED</td> <td></td> </tr> <tr> <td>JUSTIFICATION</td> <td></td> </tr> </table> </div> <div style="width: 65%;"> <div style="border: 1px solid black; width: 100%; height: 100%;"></div> </div> </div>					NTIS	GRAM	DTIC	TRAC	UNANNOUNCED		JUSTIFICATION	
NTIS	GRAM											
DTIC	TRAC											
UNANNOUNCED												
JUSTIFICATION												
DATE RECEIVED IN DTIC												
REGISTERED OR CERTIFIED NUMBER												
PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-FDAC												

HANDLE WITH CARE

# Interaction of Relativistic Electron Beams with Fusion Target Blow-off Plasmas

D. MOSHER

*Plasma Applications Branch  
Plasma Physics Division*

May 1975

This research was sponsored by the Defense Nuclear Agency under  
Subtask T99QAX LA014, work unit 05, work unit title Advanced Concepts.



NAVAL RESEARCH LABORATORY  
Washington, D.C.

DTIC QUALITY INSPECTED 1

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 3059	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)  INTERACTION OF RELATIVISTIC ELECTRON BEAMS WITH FUSION TARGET BLOW-OFF PLASMAS		5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL Problem
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)  D. Mosher		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS  Naval Research Laboratory Washington, D.C. 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  NRL Problem H02-26A Project DNA T990AXLA014
11. CONTROLLING OFFICE NAME AND ADDRESS  Defense Nuclear Agency Washington, D.C. 20305		12. REPORT DATE May 1975
		13. NUMBER OF PAGES 18
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)  UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release, distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES  This research was sponsored by the Defense Nuclear Agency under Subtask T99QAX LA014, work unit 05, work unit title Advanced Concepts.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Relativistic electron beams Pellet fusion Beam-target interactions		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  The relativistic Boltzmann equation with a Fokker-Planck collision term is solved with the assumption that elastic scattering characterizes the shortest time and length scales of the beam- plasma system. Explicit one-dimensional solutions containing the self-consistent return-current electric field show that although range-shortening occurs, the primary effect of the electric field is to prevent high-current-density beams from penetrating into the dense-plasma region.		


DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-014-6601

i

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

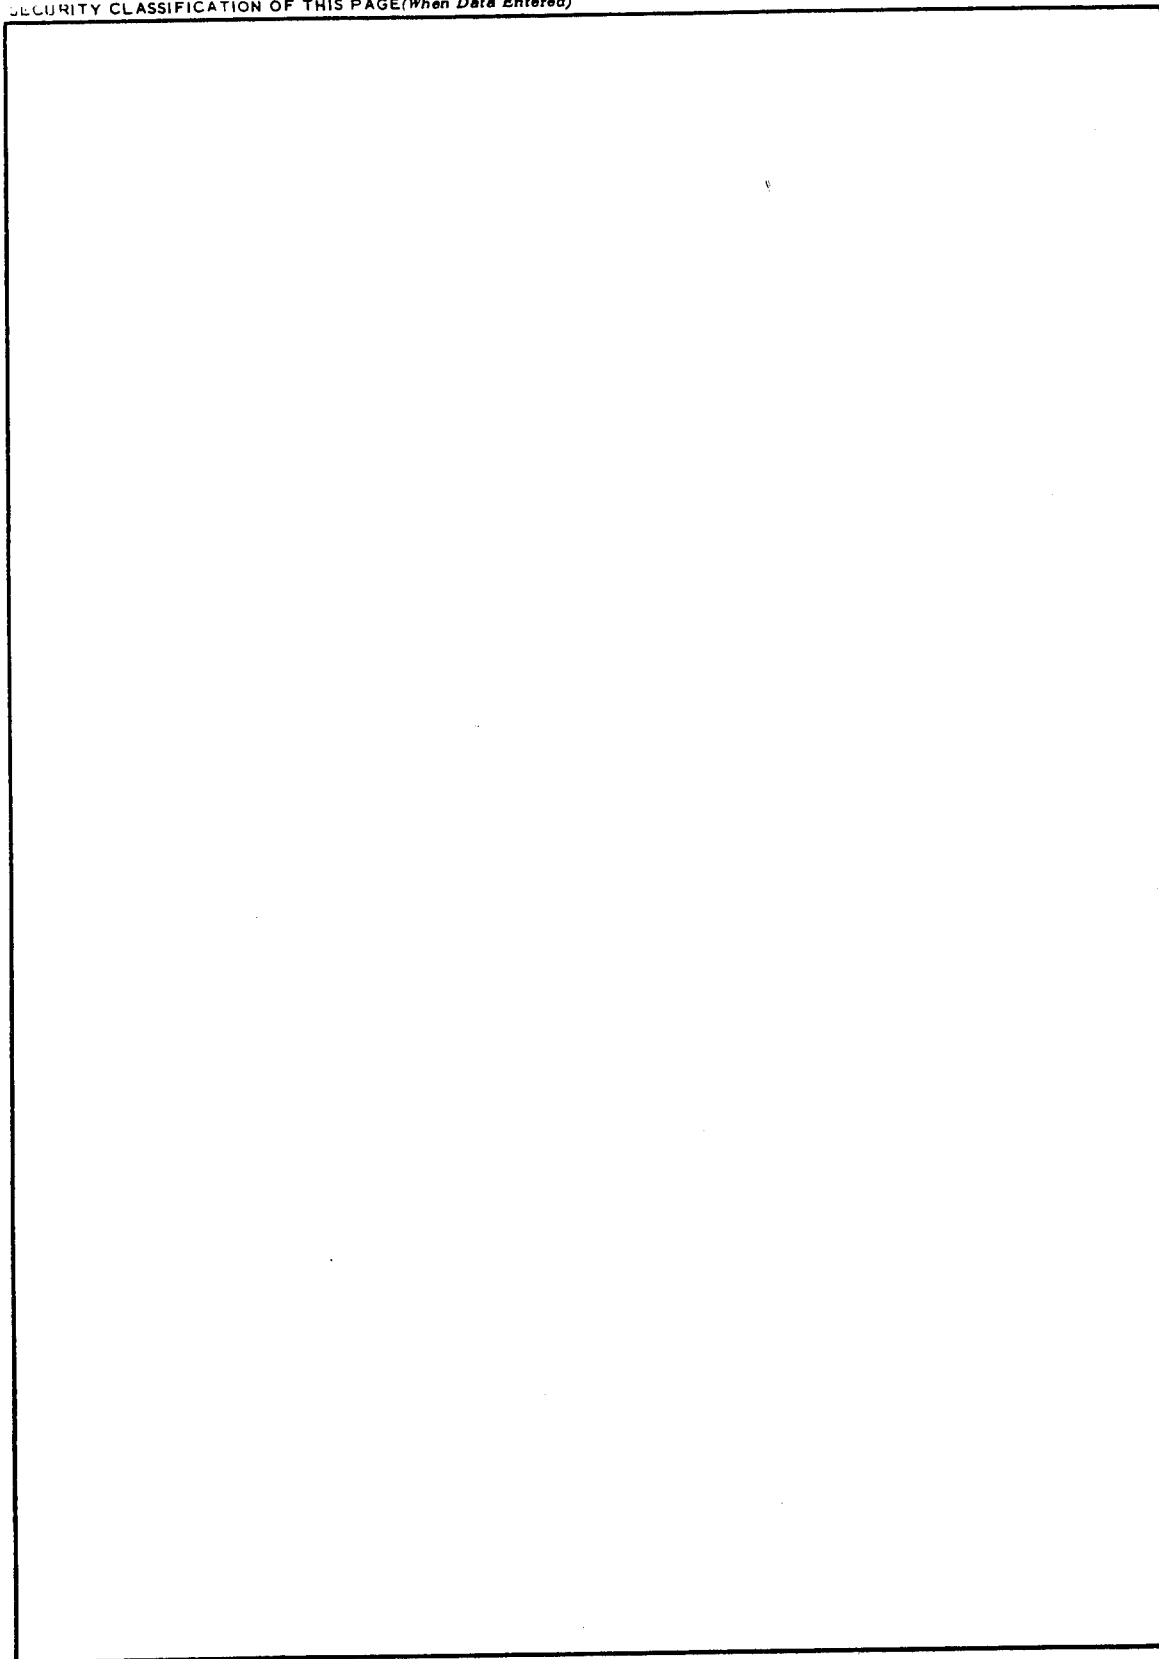

# INTERACTION OF RELATIVISTIC ELECTRON BEAMS WITH FUSION TARGET BLOW-OFF PLASMAS

The development of high-power pulse generators has created interest in the use of relativistic electron beams to compress and heat small masses of deuterium and tritium to fusion in a manner similar to that proposed using lasers.<sup>1,2</sup> In order to optimize thermonuclear yield, fusion-pellet designs employ thin shells of high-atomic-number material in which the beam deposits energy.<sup>3,4</sup> Hydrodynamic modeling of pellet implosion has neglected both the effects of the electromagnetic field and scattering collisions in the beam-heated plasma blown off of the shell.<sup>1,3</sup> This work presents a formalism which allows one to determine the character of beam deposition in the high-atomic-number plasma and shell when these effects are included. The Boltzmann equation describing the beam with a relativistically-correct Fokker-Planck collision term is solved with the assumption that the elastic-scattering collision time is the shortest characteristic time of the system. (This approximation is valid for cases of interest: the interaction of a 1-3 MeV electron beam of about 10 nsec duration with initially-solid shells of heavy material.) One-dimensional solutions are then calculated in two limiting cases of interest. From these, the energy-deposition profile and efficiency of energy coupling from beam to plasma are determined. Finally, the constraints placed on beams for fusion in light of the present analysis are discussed.

The equation describing the momentum distribution function of relativistic electrons interacting with a cold, high-atomic-number plasma may be written<sup>5</sup>

$$\frac{\partial f}{\partial t} + \frac{\vec{p}}{m\gamma} \cdot \nabla f - e \left( \vec{E} + \frac{\vec{p} \times \vec{B}}{m\gamma} \right) \cdot \nabla_p f = \nabla_p \cdot [\nu_S(p) (p^2 \vec{I} - \vec{p}\vec{p}) \cdot \nabla_p f] + \nabla_p \cdot [\nu_E(p) \vec{p} f] \quad (1)$$

where  $\gamma^2 = 1 + p^2/(mc)^2$ . The quantities  $\nu_S$  and  $\nu_E$  are energy-dependent

---

Note: Manuscript submitted May 13, 1975.

scattering and energy-loss frequencies

$$\nu_S = \Omega_S \gamma / (\gamma^2 - 1)^{3/2}; \quad \nu_E = \epsilon \gamma \nu_S \quad (2)$$

where

$$\Omega_S = 2\pi n_i r_o^2 c (Z^2 + Z) \ln \Lambda; \quad \epsilon = \frac{2}{Z+1}.$$

In the above,  $n_i$  is the plasma ion density,  $r_o$  is the classical electron radius,  $c$  is the velocity of light,  $Z$  is the plasma atomic number, and  $\ln \Lambda$  is in the range 10-20 for plasmas of interest.<sup>5</sup> We limit consideration to plasmas for which  $\epsilon \ll 1$ .

Treating  $\epsilon$  as second order in  $\nu_S^{-1}$ , the terms of Eq. (1) are ordered according to

$$O(\nu_S^{-2}) : O(\nu_S^{-1}) : O(\nu_S^{-1}) = O(1) : O(\nu_S^{-2}).$$

When  $f$  is expanded in powers of  $\nu_S^{-1}$

$$f = f_0 + f_1 + \dots,$$

Eq. (1) can be iteratively solved starting with  $O(1)$  terms. The solution correct to second order is given by

$$f_0 = f_0(\vec{p}, \vec{x}, t) \quad (3)$$

that is,  $f_0$  is isotropic in momentum space and

$$f_1 = \vec{A} \cdot \vec{p} \quad (4)$$

$$f_2 = \frac{1}{6\nu_S} \left( \frac{e\vec{E}}{p} \frac{\partial \vec{A}}{\partial p} - \frac{1}{m\gamma} \nabla \vec{A} \right) : \vec{p}\vec{p} + \frac{e}{2\nu_S m\gamma} (\vec{B} \times \vec{A}) \cdot \vec{p} \quad (5)$$

where

$$\vec{A} = \frac{1}{2v_S} \left( \frac{e\vec{E}}{p} \frac{\partial f_o}{\partial p} - \frac{1}{m\gamma} \nabla f_o \right). \quad (6)$$

The equation governing  $f_o$  is obtained by setting secular terms in the second-order equation equal to zero

$$\frac{\partial f_o}{\partial t} + \frac{p^2}{3m\gamma} \nabla \cdot \vec{A} = \frac{1}{p^2} \frac{\partial}{\partial p} \left[ p^3 (v_E f_o + \frac{1}{3} e\vec{E} \cdot \vec{A}) \right]. \quad (7)$$

In this work, moments of  $f$  which yield the beam-electron and energy fluxes are of interest. To lowest significant order, these quantities are determined from

$$\vec{\Phi} = \int \frac{\vec{p}}{m\gamma} f_1 d^3p = \int \frac{\vec{p}\vec{p}}{m\gamma} \cdot \vec{A} d^3p \quad (8)$$

$$\vec{Q} = \int mc^2(\gamma-1) \frac{\vec{p}}{m\gamma} f_1 d^3p = mc^2 \int (\gamma-1) \frac{\vec{p}\vec{p}}{m\gamma} \cdot \vec{A} d^3p. \quad (9)$$

Taking the divergence of  $\vec{\Phi}$ , substituting from Eq. (7) for  $\nabla \cdot \vec{A}$ , and integrating by parts yields

$$\nabla \cdot \vec{\Phi} = -4\pi \left( p^3 v_E f_o \right)_p = 0 \quad (10)$$

Lack of particle conservation is due to beam electrons, slowed by dynamic friction to very low energies, merging with the thermal-electron background. These are not accounted for in  $f$  since Eq. (1) describes only the distribution of super-thermal electrons.

The rate at which energy is transferred from the beam to a unit volume of plasma is obtained by taking the divergence of Eq. (9). In the steady state,

$$Q = -\nabla \cdot \vec{q} = e\vec{E} \cdot \vec{\Phi} + 4\pi \int_0^\infty \frac{p^4 v_E}{m\gamma} f_0 dp. \quad (11)$$

Steady-state solutions of  $f$  in one dimension are now considered. The plane  $x = 0$  is chosen to divide a semi-infinite, uniform plasma occupying the region  $x > 0$  from a vacuum. A monoenergetic, well-collimated beam of relativistic electrons (particle flux  $\Phi_i$ ) propagating in the vacuum is normally incident on the plasma. The plasma is assumed to be sufficiently conductive to exclude the vacuum magnetic field associated with the incident beam for times of interest.<sup>1</sup> Thus, a plasma return current  $j = e\Phi$  of thermal electrons must flow towards the vacuum-plasma interface. The electric field associated with this current is

$$E = \eta j = \eta e\Phi \quad (12)$$

where  $\eta$  is the plasma resistivity.<sup>6</sup> Plasma electrons which reach the interface are assumed to flow as  $\nabla p \times \vec{B}$  surface currents along the  $x = 0$  plane. This planar model approximates a relativistic electron beam incident on a spherical shell of high-atomic-number material for a shell thickness small compared to the radius of the sphere.

The beam-electron distribution function in the plasma can now be written

$$f = f_0(p, x) + \mu p A - \frac{\mu^2}{2v_s} \left[ eEA + \frac{1}{p^2} \frac{\partial}{\partial p} (p^3 v_E f_0) \right] \quad (13)$$

correct to second order. The second-order term has been simplified using the secular equation



$$\frac{\partial A}{\partial x} = \frac{m\gamma}{p^4} \frac{\partial}{\partial p} \left[ p^3 (3v_E f_0 + eEA) \right] \quad (14)$$

where

$$A = \frac{1}{2v_S} \left( \frac{eE}{p} \frac{\partial}{\partial p} - \frac{1}{m\gamma} \frac{\partial}{\partial x} \right) f_0 \quad (15)$$

and  $\mu$  is the cosine of the polar angle in a spherical momentum-space geometry with polar axis along  $x$ .

The beam-electron flux is given by

$$\Phi(x) = 2\pi \int_{-1}^{+1} d\mu \mu^2 \int_0^\infty dp \frac{p^4 A}{m\gamma} \quad (16)$$

When  $v_E f_0$  and  $eEA$  are comparable in magnitude, Eqs. (12) - (16) must be solved simultaneously using numerical techniques. Two limiting cases of interest which are amenable to analytical solution are now discussed.

When the plasma density is high and the beam-current density is low, dynamic friction dominates over energy loss to the electric field. Neglecting electric-field terms in Eq. (14) leads to the solution<sup>7,8</sup>

$$\gamma^2 f_0 = \frac{C x}{\tau^{3/2}} \exp\left(-\frac{x^2}{4a^2 \tau}\right) \quad (17)$$

for an incident monoenergetic beam with  $\gamma = \gamma_0$ . In Eq. (17),

$$\tau = \int_{\gamma}^{\gamma_0} \frac{(\gamma'^2 - 1)^3 d\gamma'}{\gamma'^4} = \Gamma(\gamma_0) - \Gamma(\gamma), \quad (18)$$

$$\Gamma(\gamma) = \frac{(\gamma^2 + 1)(\gamma^4 - 10\gamma^2 + 1)}{3\gamma^3}, \quad (19)$$

$a^2 = \frac{c^2}{6e\Omega^2 S}$ , and  $C$  is constant. The corresponding electron flux is

$$\Phi(x) = \Phi_0 \exp\left(-\frac{x^2}{4a^2\tau_1}\right) \quad (20)$$

where  $\tau_1 = \Gamma(\gamma_0) - \Gamma(1)$ , and  $\Phi_0 = \Phi(0)$ . The volume heating rate when  $E = 0$  may be written

$$Q_C(x) = \frac{mc^2\Phi_0\tau_1^{1/2}}{2a^2} \int_1^{\gamma_0} \exp\left(-\frac{x^2}{4a^2\tau}\right) \frac{d\gamma}{\tau^{3/2}} \quad (21)$$

The variation of  $Q_C$  with  $x$  is shown in Fig. 1.

The transmission coefficient of beam current at the interface can be estimated by equating  $\Phi_i$  with the positive-going beam current there.<sup>7</sup>

$$\Phi_i = 2\pi \int_0^1 d\mu \int_0^\infty dp \, p^2 f \frac{p\mu}{m\gamma} = \pi \int_0^\infty \frac{p^3 f_0(p,0) dp}{m\gamma} + \frac{1}{2} \Phi_0 \quad (22)$$

correct to first order. With  $f_0$  given by Eq. (17), the transmission coefficient is

$$T_C = \Phi_0/\Phi_i = \left[ \frac{1}{2} + \left( \frac{3\pi}{8\epsilon} \right)^{\frac{1}{2}} \frac{\gamma_0^2 \tau_1^{1/2}}{(\gamma_0^2 - 1)^2} \right]^{-1} \quad (23)$$

For  $\gamma_0 = 3$ ,  $T_C$  ranges from .75 for aluminum to .40 for gold.

When the beam current is high and the plasma density is sufficiently low, dynamic friction can be neglected in comparison to electric-field slowing down. In that case, Eq. (10) predicts that  $\Phi$ , and therefore  $E$  are constant. The solution of Eq. (14) to first order with  $v_E = 0$  for an incident monoenergetic beam is

$$f = f_0 + \mu p A = \left\{ \alpha - \beta \left[ K(\gamma^*) - K(\gamma_0) - \frac{e\mu}{\gamma^{*2} - 1} \right] \right\} \delta(\gamma - \gamma^*) \quad (24)$$

where  $\alpha$  and  $\beta$  are constant,  $\mathcal{E} = eE/(mc\Omega_s)$ ,

$$K(\gamma) = \frac{\gamma(\gamma^2 + 1)}{4(\gamma^2 - 1)^2} + \frac{1}{8} \ln\left(\frac{\gamma-1}{\gamma+1}\right), \quad (25)$$

and  $\gamma^*(x) = \gamma_0 - eEx/(mc^2)$ . The quantity  $\beta$  is determined by substitution into Eq. (16).

$$\Phi_0 = \frac{4\pi}{3} m^3 c^4 \mathcal{E} \beta \quad (26)$$

The heating rate in the absence of dynamic friction is given by Eq. (11).

$$Q_E = eE\Phi_0 \quad ; \quad \gamma^* \geq 1. \quad (27)$$

Using Eq. (22), the transmission coefficient is

$$T_E = \frac{4\mathcal{E}\beta/3}{(\gamma_0^2 - 1)\alpha + 2\mathcal{E}\beta/3} \quad (28)$$

A reasonable boundary condition for large  $x$  is needed to determine  $\alpha$ . Since  $v_E$  increases with  $x$  according to Eq. (2) and the definition of  $\gamma^*$ , dynamic friction must dominate over the electric field for sufficiently-large  $x$ . The values of  $\gamma^*$  and  $x$  at which dynamic friction becomes important can be estimated by equating the two terms on the right side of Eq. (14)

$$3v_E f_0 = eEA \quad @ \quad \gamma^* = \gamma_c = \gamma_0 - eEx_c/(mc^2)$$

or

$$\mathcal{E}^2 \beta = 3\epsilon \gamma_c^2 \left\{ \alpha - \beta [K(\gamma_c) - K(\gamma_0)] \right\} \quad (29)$$

The region  $x > x_c$  represents a strong absorber of slowed-down electrons. It is then reasonable to set the negative-going current at  $x = x_c$  equal to zero. To first order,

$$\Phi_R(x_c) = 2\pi \int_1^0 \mu d\mu \int_0^\infty \frac{p^3 f_o(p, x_c)}{m\gamma} dp + \frac{1}{2} \Phi_o = 0$$

or

$$\alpha = \beta \left[ \frac{2}{3} \frac{\mathcal{E}}{\gamma_c^2 - 1} + K(\gamma_c) - K(\gamma_o) \right]. \quad (30)$$

Simultaneous solution of Eqs. (29) and (30) yield  $\gamma_c$  and  $\alpha$ . The resulting variation of transmission with electric field is shown in Fig. 2 for  $\gamma_o = 3$ . The electric field is related to the penetrating beam current by Eq. (12).

$$e\Phi_o = 8.4 \times 10^{-17} (Z + 1) n_1 \theta^{3/2} \mathcal{E} \quad \frac{\text{A}}{\text{cm}^2} \quad (31)$$

Here,  $\theta$  is the plasma electron temperature in eV.

The above calculations show that although the electric field reduces the beam transmission into the plasma, it does increase the volume heating rate above that due to dynamic friction alone. Its importance to heating can be estimated by comparing the heating rates  $Q_E$  and  $Q_C$  averaged over  $x$ . For  $\gamma_o = 3$ ,  $Q_E/\bar{Q}_C \approx \mathcal{E}/\epsilon^{\frac{1}{2}}$ , so that electric-field heating dominates when  $\mathcal{E} \gg \epsilon^{\frac{1}{2}}$ . The region indicated by this inequality is shown in Fig. 2. It is seen that electric-field (or return-current) heating is important only when  $\mathcal{E}$  is large enough to reflect all but a small portion of the incident beam. Thus, in order to maximize energy transfer from beam to plasma, the plasma should be prepared in a manner which keeps  $\mathcal{E}$  small everywhere. In terms

of the incident current  $J_i = e\Phi_o/T_E$ , this condition takes the form

$$J_i \leq 10^{-15} n_i \theta^{3/2} \frac{\text{A}}{\text{cm}^2} \quad (32)$$

For incident currents of  $10^9 \text{ A/cm}^2$  and 1 keV temperatures,<sup>1</sup> Eq. (32) suggests that poor penetration occurs into plasmas with ion densities less than  $10^{19} \text{ cm}^{-3}$ . If, during pellet irradiation, the blow-off has sufficient time to expand to a low density region of large extent, poor coupling of the beam to the dense-plasma or solid portion of the shell is predicted. However, if the beam is not strongly scattered in the low-density blow-off, high transmission to, and collisional heating in the dense plasma region can occur. For blow-off plasmas obeying fluid-equation similarity solutions,<sup>2</sup> the condition that the beam not be strongly scattered in the region  $n_i \leq 10^{15} J_i \theta^{-3/2}$  is

$$J_i \tau < 10^2 \sqrt{v_o^2 \theta / Z^2} \quad \text{C/cm}^2 \quad (33)$$

where  $\tau$  is the beam duration in sec. Relativistic electron beams for fusion should, and as proposed<sup>1</sup> do, satisfy this requirement.

It should be mentioned that the assumption of poor magnetic field penetration leading to the creation of large electric fields in the plasma is not usually valid in present-day, low-temperature blow-off experiments. Comparing the electromagnetic skin depth<sup>3</sup> with the blow-off thickness<sup>2</sup> suggests that magnetic neutralization occurs when

$$\tau > 5 \times 10^{-5} Z \theta^{-5/2} \quad \text{sec.} \quad (34)$$

Thus, temperatures in excess of about 10 eV are required for substantial return currents.

In summary, it has been shown that the existence of large return-current-generated electric fields in pellet blow-off plasmas do not increase beam-energy deposition because they tend to inhibit beam penetration to high plasma densities.

#### ACKNOWLEDGEMENT

The author is indebted to Prof. Ira Bernstein for his numerous invaluable suggestions. This work was supported by the Defense Nuclear Agency.

#### REFERENCES

1. G. Yonas, J. W. Poukey, K. R. Prestwich, J. R. Freeman, A. J. Toepfer and M. J. Clauser, Nucl. Fusion 14, 731 (1974).
2. K. M. Brueckner, IEEE Trans. Plasma Sci. 1, 13 (1973).
3. L. I. Rudakov and A. A. Samarsky in Proc. 6th Europ. Conf. on Controlled Fusion and Plasma Physics (Moscow 1973), p. 487.
4. M. J. Clauser, Phys. Rev. Lett. 34, 570 (1975).
5. D. Mosher, Naval Research Lab. Memo Report 2959 (1974), accepted for publication.
6. L. Spitzer, "Physics of Fully Ionized Gases" (Interscience, New York, 1962), p. 138.
7. H. A. Bethe, M. E. Rose and L. P. Smith, Proc. Amer. Phil. Soc. 78, 573 (1938).
8. P. M. Morse and H. Feshbach, "Methods of Theoretical Physics" (McGraw-Hill, New York, 1953), Chap. 7.
9. J. D. Jackson, "Classical Electrodynamics" (John Wiley & Sons, New York, 1962), Chap. 7.

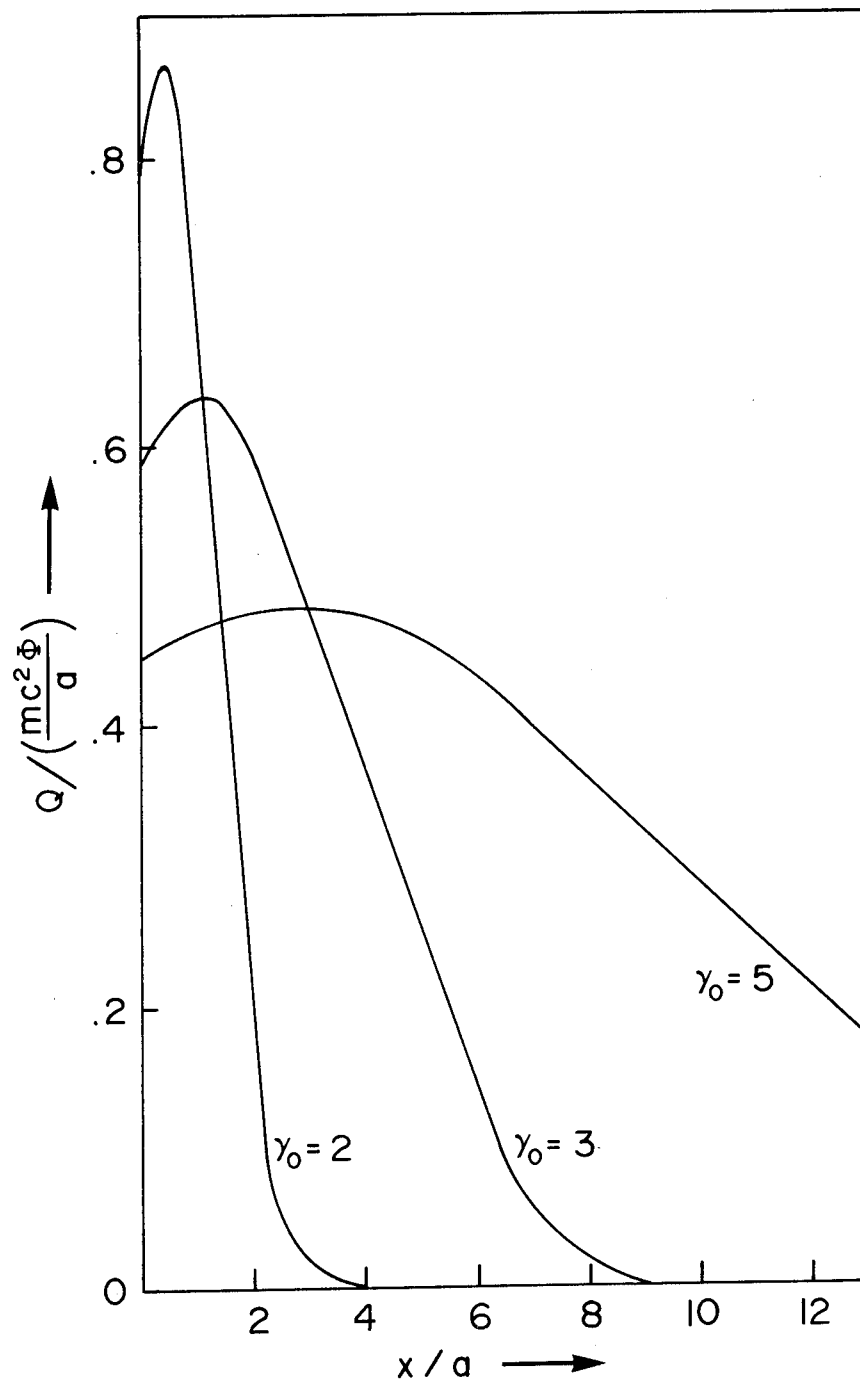


Fig. 1 - Normalized volume-heating rate vs depth into plasma  
for three values of  $\gamma_0$



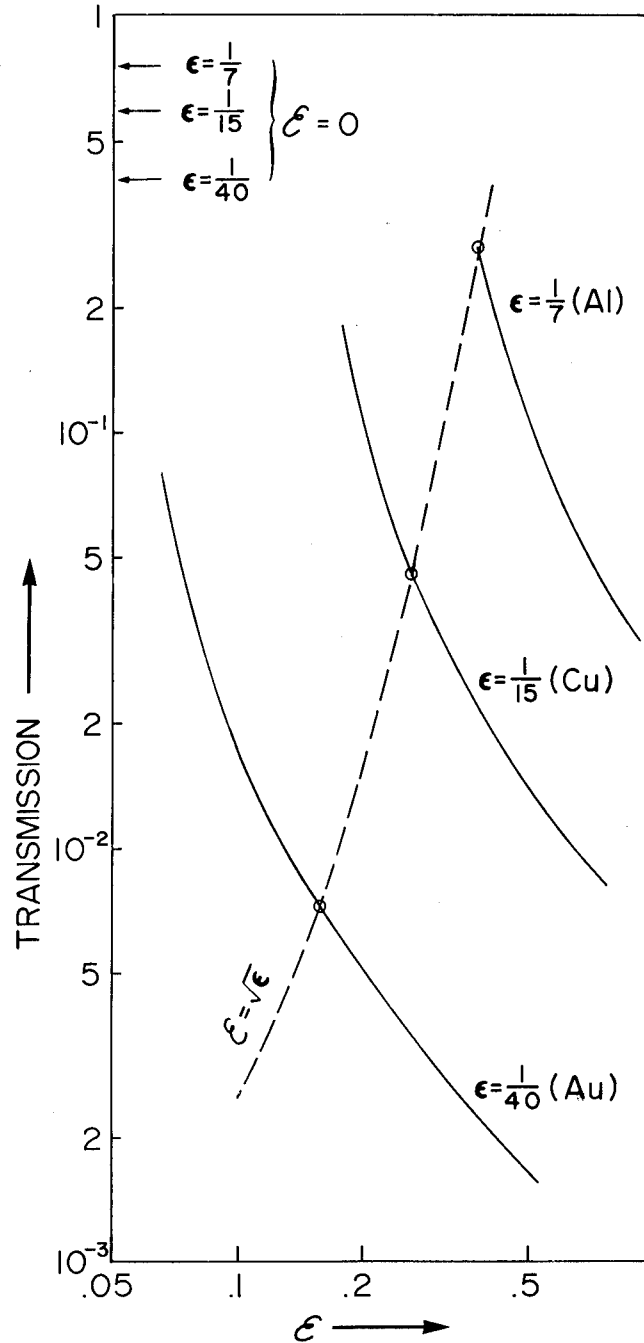


Fig. 2 - Transmission coefficient vs normalized electric field strength in plasma for  $\gamma_0 = 3$  and three atomic numbers. Return-current heating dominates to the right of the  $\epsilon = \epsilon^{1/2}$  curve.

1. Director  
Defense Advanced Research Projects Agency  
Architect Building  
1400 Wilson Boulevard  
Arlington, VA 22209  
Attn: Sto. Ltc. R. P. Sullivan
2. Director  
Defense Nuclear Agency  
Washington, D. C. 20309  
Attn: DDST, Mr. Peter Haas  
RATN  
APTL, Technical Library (2 copies)  
RAEV  
STVL  
APSI (Archives)
3. Director of Defense Research and Engineering  
Washington, D.C. 20301  
Attn: DAD (SK) Mr. G. R. Barse
4. Commander  
Harry Diamond Laboratories  
Washington, D.C. 20438  
Attn: AMXDO-RBF, Mr. John Rosaco  
AMXDO-RBH, Mr. S. Graybill  
AMXDO-RC, Dr. Robert Oswald, Chief Lab 300
5. Air Force Weapons Laboratory, AFSC  
Kirkland AFB, NM 87117  
Attn: DY, Dr. Guenther  
EL, Mr. John Darrah  
DYS, Dr. Payton  
SAA  
SUL, Technical Library  
ELP, TRE Section
6. Space and Missile Systems Organization  
Post Office Box 92960  
Worldway Postal Center  
Los Angeles, CA 90009  
Attn: SKT, Peter H. Stadler  
RSP, System Defn. and Assessment, Ltc. Gilbert

Sandia Laboratories  
P. O. Box 5800  
Albuquerque, NM 87115  
Attn: Document Control for Dr. J. V. Walker, 5220  
Document Control for 5242, Dr. G. Yonas  
Document Control for Technical Library

Aerospace Corporation  
P. O. Box 92957  
Los Angeles, CA 90009  
Attn: J. Benveniste  
Dr. Jerry Comisar

Austin Research Associates, Inc.  
600 West 28th Street  
Austin, Texas 78705  
Attn: Dr. William E. Drummond

Battelle Memorial Institute  
505 King Avenue  
Columbus, Ohio 43201  
Attn: P. Malozzi

Maxwell Laboratories, Inc.  
9244 Balboa Avenue  
San Diego, CA 92123  
Attn: Dr. P. Korn

Mission Research Corporation  
735 State Street  
Santa Barbara, CA 93101  
Attn: Dr. Conrad L. Longmire

Physics International Company  
2700 Merced Street  
San Leandro, CA 94577  
Attn: Doc. Control for Dr. Sid Putnam  
Doc. Control for Mr. Ian Smith

R & D Associates  
P. O. Box 3580  
Santa Monica, CA 90403  
Attn: Dr. Bruce Hartenbaum

Science Applications, Inc.  
P. O. Box 2351  
La Jolla, CA 92037  
Attn: Dr. J. Robert Beyster

16. Stanford Research Institute  
333 Ravenswood Avenue  
Menlo Park, CA 94025  
Attn: Dr. Robert A. Armistead
17. Van Lint, Victor A. J. (Consultant)  
7850 Convoy Court  
San Diego, CA 92111
18. DDC, 12 cys
19. Code 2628, 20 cys
20. Code 7700, 25 cys.
21. Code 7770, 20 cys